

Servo amplifier

mcDSA-F15-EtherCAT

Article number: 1513810

 Certification: 

E475093


Picture similar

Technical data

Absolute maximum rating	
Voltage (destruction limit) Up no polarity reversal protection	70 V
Continuous voltage (destruction limit) Ue no polarity reversal protection	33 V
Short term peak voltage < 1s Ue (destruction limit) no polarity reversal protection	37 V
Power	
Electronic supply voltage Ue	9..30 V
Electronic current consumption@ Ue=24V*2	typ. 60 mA
Power supply voltage Up	9..60 V
Max. output current	225 A
Continuous output current (certified UL/CE)*3 @Up ≤ 24V	77 A
@Up ≤ 60V	65 A
Continuous output current (not certified)*4 @Up ≤ 24V	85 A
@Up ≤ 48V	70 A
PWM	
PWM frequency	32 kHz
Mechanical	
Size LxWxH	111 x 100 x 55.4 mm
Weight	630 g
Environment	
Protection class	IP20
Ambient temperature (operation) (certified UL/CE)	-25..40 °C
Ambient temperature (operation) (not certified)	-25..70 °C
Ambient temperature (storage)	-25..85 °C
Rel. humidity (non-condensing)	5..90 %
CAN bus	
Protocol	DS301
Device profile	DS402
Max. baudrate	1 Mbit/s
CAN specification	2.0B
Galvanically isolated	yes
EtherCAT	
Type	EtherCAT Slave
Physical layer	100 Base-Tx EtherCAT
Bus controller	ET1100
Max. baudrate	100 Mbit/s
Number of ports	2xRJ45 (In,Out)
Protocol	CoE (CANopen over EtherCAT)

Functional safety	
Safety function refer safety manual	Safe Torque Off (STO)
Safety Integrity Level (SIL)	up to SIL 3
Performance Level (PL)	up to PL e
Sensor supply (Encoder/Hall)	
Output voltage	5 V
Max. output current	0.2 A
Incremental encoder	
Type	incremental
Signals	A,/A,B,/B,Inx,/Inx
Max. frequency (per channel)	500 kHz
Input voltage (24V tolerant)	0..5 V
Signal type	differential, open collector, single ended
Hall sensors	
Signals	H1,/H1,H2,/H2,H3,/H3
Max. frequency (per channel)	10 kHz
Input voltage (24V tolerant)	0..5 V
Signal type	differential, open collector, single ended
Digital inputs	
Number - digital inputs	6 (Din0..5)
Low voltage	0..5 V
High voltage	8..30 V
Notice	Din5 parallel with Dout2*5
STO channels (ST0-A..B)	
Low voltage	0..5 V
High voltage	8..30 V
Digital outputs	
Number	3 (Dout0..2)
Continuous output current (certified UL/CE)	1 A
Continuous output current (not certified)	1.5 A
Load	resistive, inductive
Output voltage	Electronic supply voltage Ue
Signal type	positive switching
Notice	Dout2 parallel with Din5
Analog inputs	
Number	2 (Ain0..1)
Signal type - Ain0	+/- 10 V, 12 Bit, differential
Signal type - Ain1	+/- 10 V, 12 Bit, single ended

*1 The certified performance data must be observed (see UL Instruction Note and Safety Manual (CE))

*2 power amplifier switched off, 5V output (sensor supply) is free, STO active

*3 connector cable with max. possible cable cross-section, PWM frequency 32 kHz (SVPWM), ambient temperature 40 °C, I/O's and 5V output active, RMS current: 77 A → 54 Aeff, 65 A → 45 Aeff

*4 connector cable with max. possible cable cross-section, PWM frequency 32 kHz (SVPWM), ambient temperature 40 °C, I/O's and 5V output free, RMS current: 85 A → 60 Aeff, 70 A → 50 Aeff


no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

*5 Input voltage must not exceed Electronic supply voltage Ue

Additional technical data are available in mcManual.


 miControl® GmbH
 Chausseestraße 34
 14979 Großbeeren (bei Berlin)

Scheme

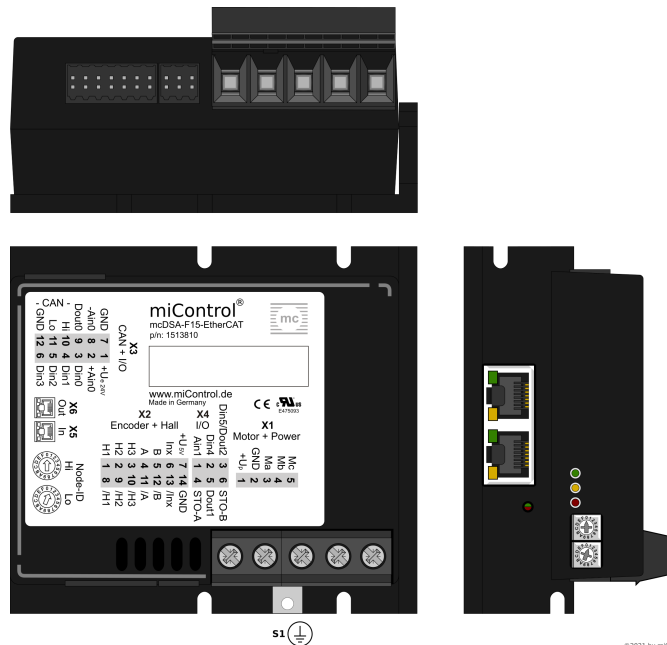

© 2021 by miControl

Terminal assignment

X1	Motor	
1	+Up	Power supply voltage
2	GND	Ground for power supply voltage
3	Ma	Motor phase A
4	Mb	Motor phase B
5	Mc	Motor phase C
X2	Hall and inc. encoder	
1	H1	Hall sensor 1
2	H2	Hall sensor 2
3	H3	Hall sensor 3
4	A	Inc. encoder, A channel
5	B	Inc. encoder, B channel
6	Inx	Inc. encoder, index channel
7	+U5V	5V output voltage for sensor supply Sensors: encoder, hall
8	/H1	Hall sensor 1 inverted
9	/H2	Hall sensor 2 inverted
10	/H3	Hall sensor 3 inverted
11	/A	Inc. encoder, A channel inverted
12	/B	Inc. encoder, B channel inverted
13	/Inx	Inc. encoder, index channel inverted
14	GND	Ground for sensor supply Notice: don't connect with system GND
X3	I/O's and CAN	
1	+Ue24V	Electronic supply voltage
2	+Ain0	Analog input 0, plus
3	Din0	Digital input 0
4	Din1	Digital input 1
5	Din2	Digital input 2
6	Din3	Digital input 3
7	GND	Ground for electronic supply voltage
8	-Ain0	Analog input 0, minus
9	Dout0	Digital output 0
10	CAN Hi	CAN High
11	CAN Lo	CAN Low
12	CAN GND	CAN Ground

X4	I/O's	
1	Ain1	Analog input 1
2	Din4	Digital input 4
3	Din5/Dout2	Digital input 5 / Digital output 2
4	STO-A	STO channel A
5	Dout1	Digital output 1
6	STO-B	STO channel B
S1	Screw (M4)	
-	FE	Functional earth
X5	EtherCAT - In port	
-	In	In
X6	EtherCAT - Out port	
-	Out	Out