

Servo amplifier

mcDSA-F32-Lp

Article number: 1514227

 Certification: 
 E475093


Picture similar

Technical data

Absolute maximum rating (destruction limits)	
Power supply voltage Up no polarity reversal protection	70 V
Continuous Electronic supply voltage Ue no polarity reversal protection	33 V
Short term peak voltage < 1s Ue no polarity reversal protection	37 V
Power	
Electronic supply voltage Ue	18..30 V
Electronic current consumption@ Ue=24V*2	typ. 65 mA
Power supply voltage Up	9..60 V
Max. output current	60 A
Continuous output current (certified UL)*3 @Up ≤ 24V @Up ≤ 60V	17.5 A 13.4 A
Continuous output current (certified CE)*4 @Up ≤ 24V @Up ≤ 60V	19 A 15 A
Continuous output current (not certified)*5 @Up ≤ 24V @Up ≤ 48V	20 A 17 A
PWM	
PWM frequency	32 kHz
Mechanical	
Size LxWxH	70 x 50 x 20 mm
Weight	50 g
Environment	
Protection class	IP00
Installation requirements **	IP54
Ambient temperature (operation) (certified UL)	-40..40 °C
Ambient temperature (operation) (certified CE/not certified)	-40..70 °C
Ambient temperature (storage)	-40..85 °C
Rel. humidity (non-condensing)	5..90 %
CAN bus	
Protocol	DS301
Device profile	DS402
Max. baudrate	1 Mbit/s
CAN specification	2.0B
Galvanically isolated	no
RS485	
Type	2-Wire EIA-485
Signals	DATA,/DATA,CLK,/CLK

Functional safety	
Safety function refer safety manual	Safe Torque Off (STO)
Safety Integrity Level (SIL)	up to SIL 3
Performance Level (PL)	up to PL e
Sensor supply (Hall)	
Output voltage	5 V
Max. output current	0.05 A
Sensor supply (Encoder/SSI)	
Output voltage	5 V
Max. output current	0.2 A
Sensor supply (Hiperface)	
Output voltage	10 V
Max. output current	0.25 A
Encoder	
Type	sin / cos
Signals	+Sin,-Sin,+Cos,-Cos
Resolution	13 bit per sine period
Input voltage	1 V peak-peak, differential
Signal type	sine/cosine, analog, differential
Hall sensors	
Signals	H1,H2,H3
Max. frequency (per channel)	10 kHz
Input voltage	0..5 V
Signal type	open collector, single ended
Digital inputs	
Number - digital inputs	6 (Din0..5)
Low voltage	0..5 V
High voltage	8..30 V
STO channels (ST0-A..B)	
Low voltage	0..5 V
High voltage	8..30 V
Digital outputs	
Number	3 (Dout0..2)
Continuous output current (certified UL/CE)	1 A
Continuous output current (not certified)	1.5 A
Load Dout0..1	resistive, low inductive
Load Dout2	resistive, inductive
Output voltage	Electronic supply voltage Ue
Signal type	positive switching
Analog inputs	
Number	2 (Ain0..1)
Signal type - Ain	0..10 V, 12 Bit, single ended

*1 The certified performance data must be observed (see UL Instruction Note and Safety Manual (CE))

*2 power amplifier switched off, 5V output (sensor supply) is free, STO active

*3 connector cable with max. possible cable cross-section, PWM frequency 32 kHz (SVPWM), ambient temperature 40 °C, I/O's and 5V output active, RMS current: 17.5 A → 12.5 Aeff, 13.4 A → 9.5 Aeff

*4 connector cable with max. possible cable cross-section, PWM frequency 32 kHz (SVPWM), ambient temperature 40 °C, I/O's and 5V output active, RMS current: 19 A → 13.4 Aeff, 15 A → 10.6 Aeff

*5 connector cable with max. possible cable cross-section, PWM frequency 32 kHz (SVPWM), ambient temperature 40 °C, I/O's and 5V output free, RMS current: 20 A → 14.1 Aeff, 17 A → 12.0 Aeff

no guarantee, since value is determined empirical, please consider the application notes to determine the continuous current

*6 or equivalent protection class (see Safety Manual (CE))

Additional technical data are available in mcManual.



miControl® GmbH


Chausseestraße 34

14979 Großbeeren (bei Berlin)

Copyright 2021 by miControl® - Modifications and errors excepted
mcDSA-F32-Lp - PV1.08.00.00 / DV1.00.01.02

Web: www.miControl.de e-mail: info@miControl.de Tel.: +49 (3379) 312 59-0 Fax: +49 (3379) 312 59-19

Scheme

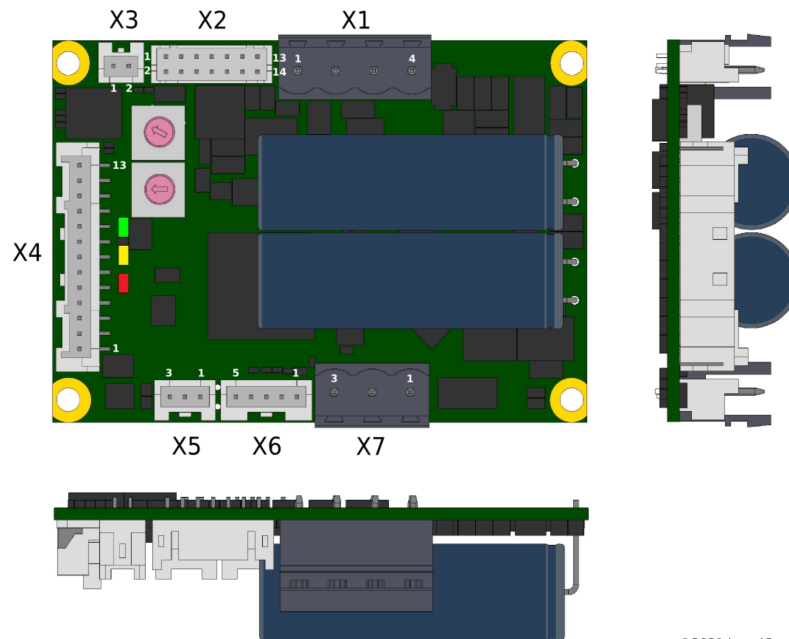

©2021 by miControl

Terminal assignment


X1 Supply		
1	GND	Ground for electronic supply voltage
2	+Ue24V	Electronic supply voltage
3	GND	Ground for power supply voltage
4	+Up	Power supply voltage
X2 Encoder		
1	CLK	SSI clk
2	/CLK	/SSI clk
3	DATA	SSI data
4	/DATA	/SSI data
5	+10V	10V output voltage for sensor supply Sensors: Hiperface
6	GND	Ground for sensor supply Notice: don't connect with system GND
7	+SIN	Encoder, plus sine signal
8	-SIN	Encoder, minus sine signal
9	+COS	Encoder, plus cosine signal
10	-COS	Encoder, minus cosine signal
11	res.	Reserved
12	res.	Reserved
13	+5V	5V output voltage for sensor supply Sensors: encoder, SSI
14	GND	Ground for sensor supply Notice: don't connect with system GND
X3 PT1000		
1	PT_A	PT_A
2	PT_B	PT_B
X4 I/O's		
1	STO-B	STO channel B
2	Din0	Digital input 0
3	Din1	Digital input 1
4	Din2	Digital input 2
5	Din3	Digital input 3
6	Din4	Digital input 4
7	Din5	Digital input 5
8	STO-A	STO channel A
9	Ain0	Analog input 0
10	Ain1	Analog input 1
11	Dout0	Digital output 0
12	Dout1	Digital output 1
13	Dout2	Digital output 2

X5 CAN bus		
1	CAN Hi	CAN High
2	CAN Lo	CAN Low
3	CAN GND	CAN Ground
X6 Hall encoder		
1	H1	Hall sensor 1
2	H2	Hall sensor 2
3	H3	Hall sensor 3
4	+U5V	5V output voltage for sensor supply Sensors: hall
5	GND	Ground for sensor supply Notice: don't connect with system GND
X7 Motor		
1	Ma	Motor phase A
2	Mb	Motor phase B
3	Mc	Motor phase C

Diagrams

miControl®


mcDSA-F32-LP Rev.A1

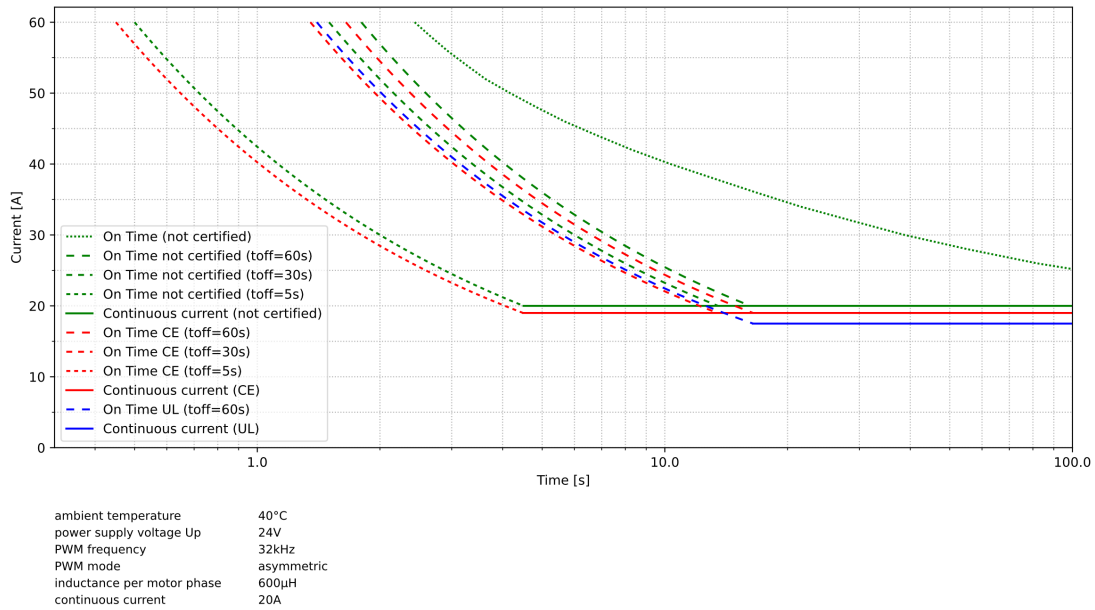

Copyright 2021© by miControl® - Modifications and errors excepted - 1.00.00.01

miControl®

mcDSA-F32-LP Rev.A1

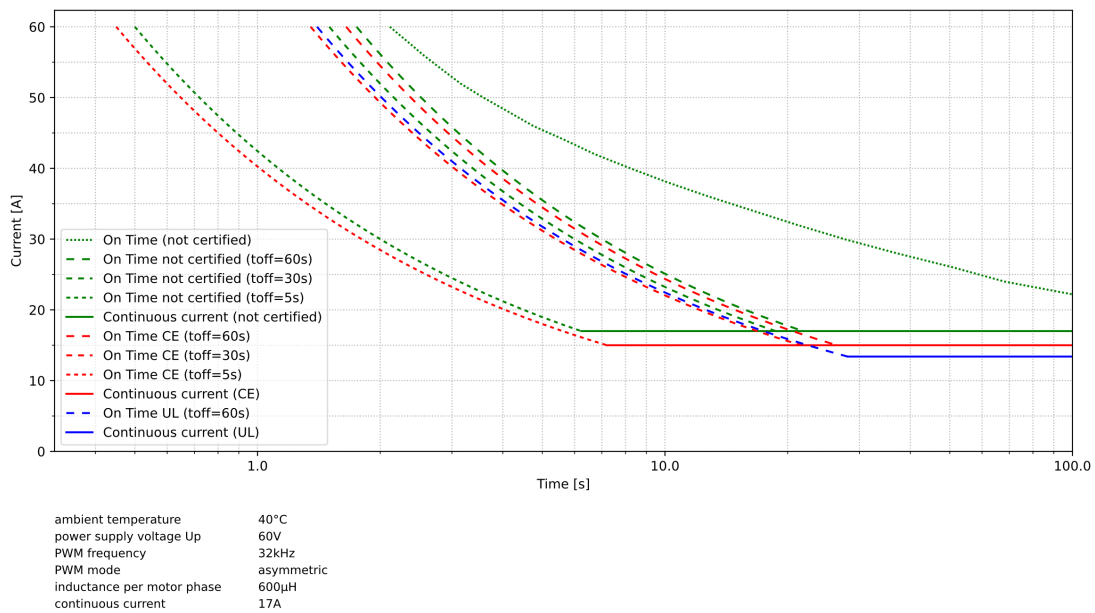


Copyright 2021© by miControl® - Modifications and errors excepted - 1.00.00.01

Diagrams

miControl®


mcDSA-F32-LP Rev.A1

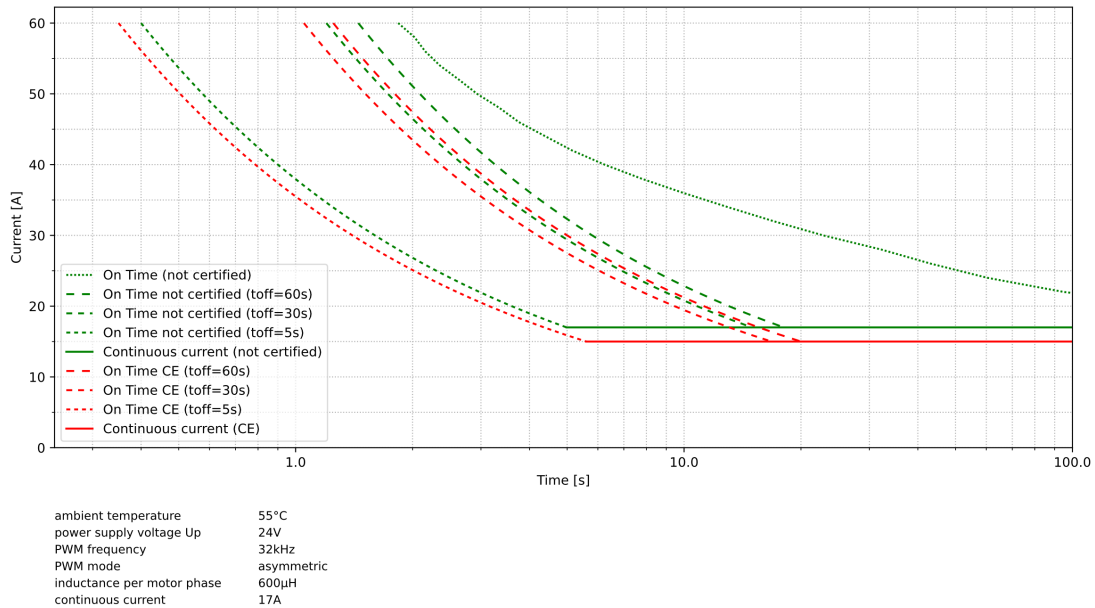

Copyright 2021© by miControl® - Modifications and errors excepted - 1.00.00.01

miControl®

mcDSA-F32-LP Rev.A1

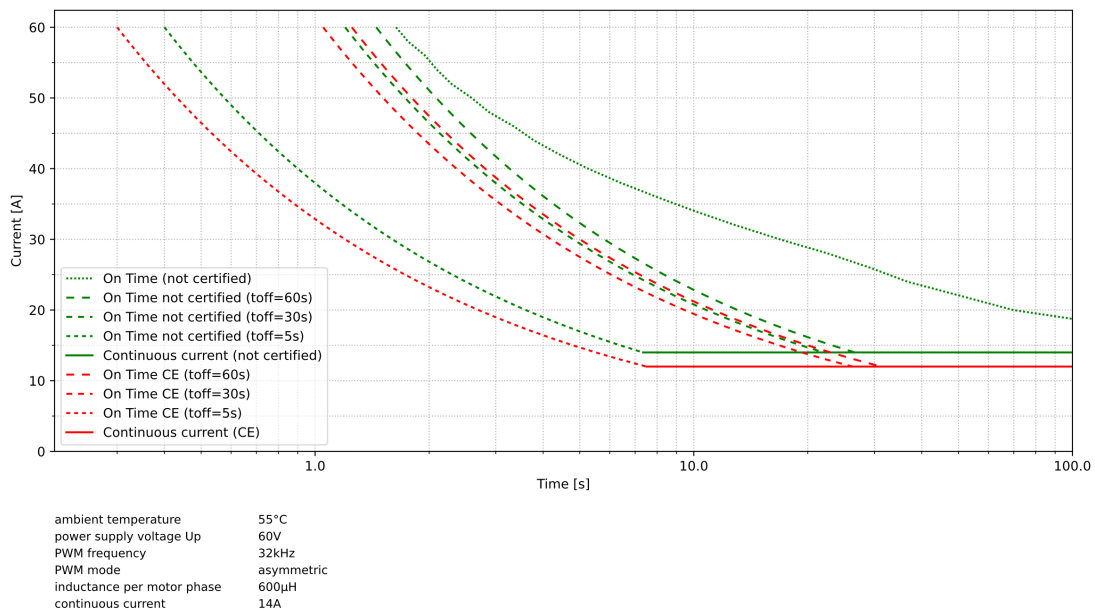


Copyright 2021© by miControl® - Modifications and errors excepted - 1.00.00.01

Diagrams

miControl®


mcDSA-F32-LP Rev.A1

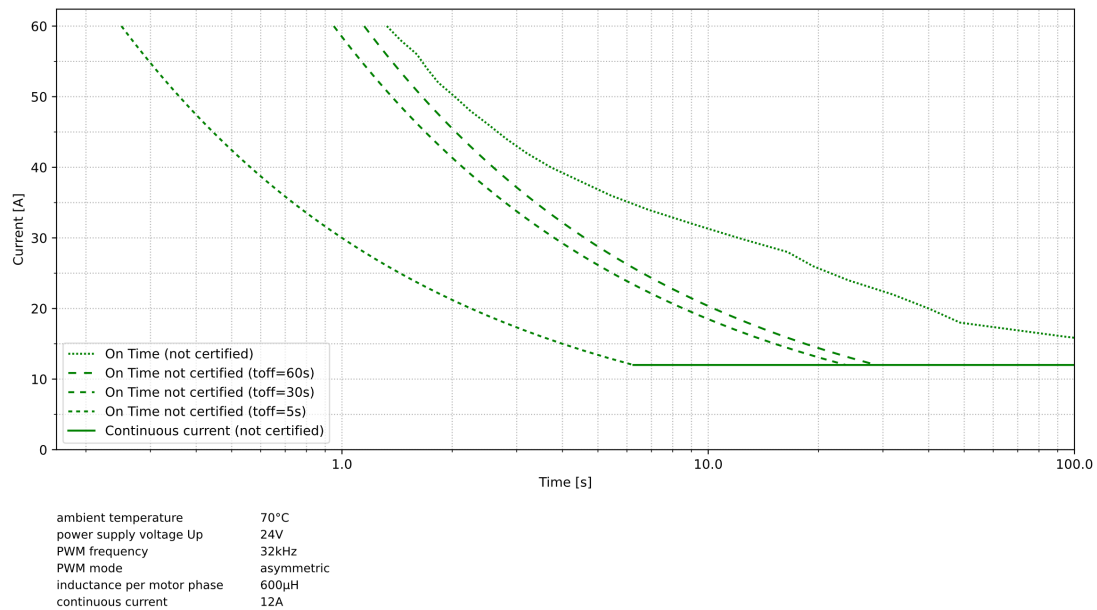

Copyright 2021© by miControl® - Modifications and errors excepted - 1.00.00.01

miControl®

mcDSA-F32-LP Rev.A1

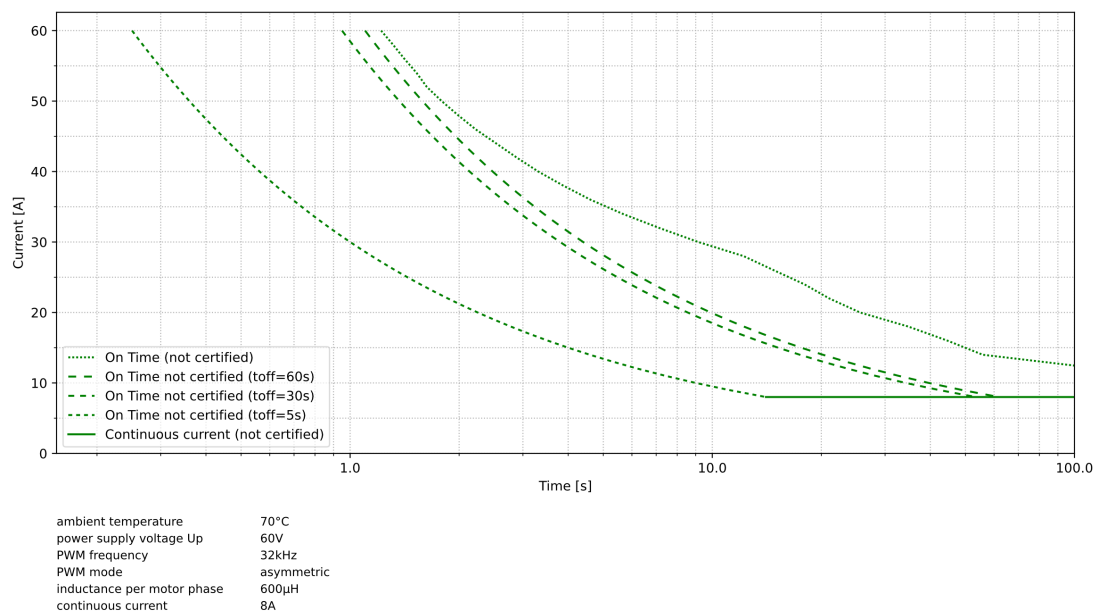

Copyright 2021© by miControl® - Modifications and errors excepted - 1.00.00.01

