

Brake chopper

mcER-L60-60

Article number: 1511532




Picture similar

Technical data

Absolute maximum rating	
Voltage (destruction limit) no polarity reversal protection	100 V
Power	
Electronic supply voltage U _p	18..60 V
Electronic current consumption	typ. 10 mA
Braking peak current @ U _{Br} =60V	60 A
Max. braking continuous current @ Ta=40°C	5 A
Braking resistor	
Braking voltage U _{Br}	60 V
Braking resistor @ U _{Br} =30V	min. 1 Ohm (external)
Maximum duty cycle	100 %
Integrated electrolytic capacitors	100 uF
Mechanical	
Size LxWxH	74 x 45.5 x 14 mm
Weight	30 g
Environment	
Protection class	IP20
Ambient temperature (operation)	-40..70 °C
Ambient temperature (storage)	-40..85 °C
Rel. humidity (non-condensing)	5..90 %
Error recognition	
Short circuit braking resistor	yes
Braking resistor is missing / defective	yes
Overtemperature electronic	yes
Overtemperature braking resistor	no

Digital output	
Number	1 (/Error)
Continuous output current	typ. 10 mA
Load	resistive
Output voltage	Up (24V max.)
Signal type	positive switching

Scheme

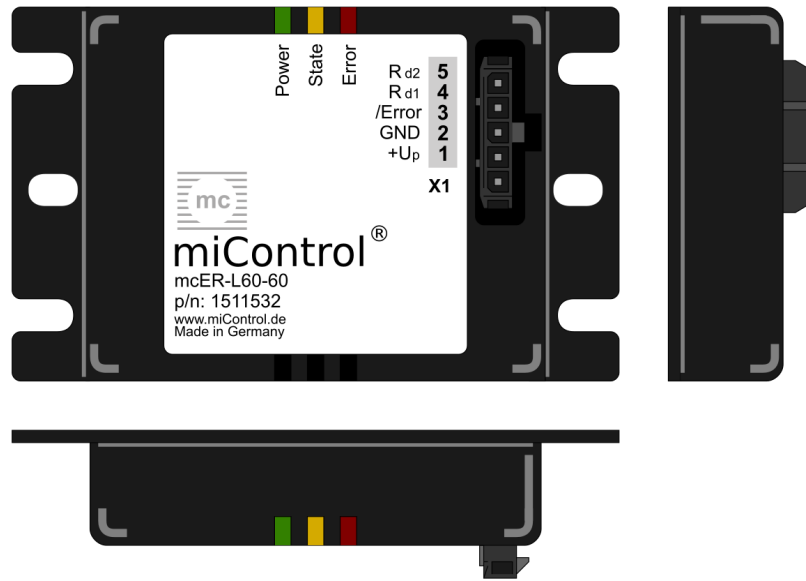

©2021 by miControl

Terminal assignment

X1	Supply	
1	GND	Ground for power supply voltage
2	+Up	Power supply voltage
3	Rd1	Braking resistor
4	/Error	Error output
5	Rd2	Braking resistor